


# HAZARDOUS LOCATION

## Configuration Code XP08 Hazardous Location Non-Incendive Certified, Heat-Tracing Thermocouple Assemblies

Hazardous location certified Heat-Tracing Thermocouple assemblies are designed for use in systems that measure the surface temperature of process pipe that is carrying products whose temperatures must be controlled to prevent freeze-up, or to maintain a viscosity level so that the inner medium will flow. These products are CSA Certified for use in US and Canada hazardous locations designated: Class I, Division 2, Group A,B,C,D; Class II, Division 2, Group F,G; Class III; and USA: Class I, Zone 2, Group IIC; Zone 22, Group IIIB; Zone 22, Group IIIC; T6...T1: with nonincendive field wiring, Ingress Protection: IP66, Type 4X. The service temperature range for Certified Assemblies is limited to -25°C to 435°C and the T-code corresponds to the higher of ambient or process temperature. These Thermocouples are offered in a variety of temperature ranges and are supplied with a 316SS sheath, and a 3/4" radius stainless steel mounting pad.

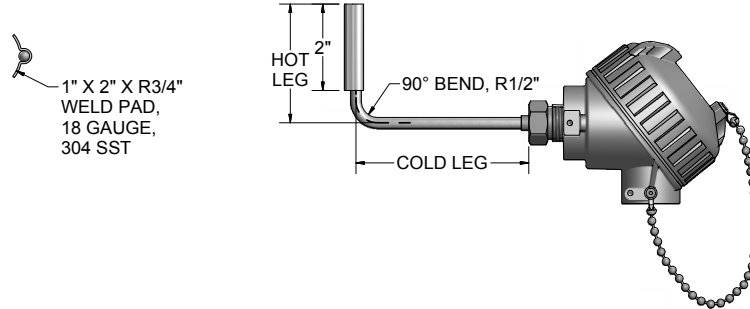

## ORDER CODES

### Example Order Number:

1-0 2-0 2-1 2-2 3-0 4-0 5-0 5-1  
**HL05 - J 48 U - HT - 0304 - 18RD - 91,OR,GS I**

#### 1-0 Agency Approval

CODE	DESCRIPTION
HL05	CSA Non-Incendive Class I Division II Certified

#### 2-0 Thermocouple Types

CODE	
SINGLE	DUPLEX
E	EE
J	JJ
K	KK
T	TT

#### 2-1 316 SS Sheath Diameters and Insulation Type

CODE	DIAMETER (inches)	Insulation Type
48	1/4	MgO
68	3/8	MgO
P48	1/4	Fiberglass
P68	3/8	Fiberglass

#### 2-2 Measuring Junction

CODE	DESCRIPTION
U	Ungrounded
ELEMENT OPTIONS	
M	Special Limits of Error

#### 3-0 Sheath Lengths

CODE	HOT LEG (inches)	COLD LEG (inches)
0304	3	4
0306	3	6
0308	3	8

Consult factory for other hot leg lengths or cold leg lengths.

#### 4-0 Radius Mounting Pads 1" W x 2" L x 18 Ga. 304 SS

CODE	RADIUS (inches)	NPT PIPE SIZE (inches)
18RD	3/4	1 1/2

Mounting pad is flexible enough to be formed around pipe sizes from 1" to 12" NPS pipe.

#### 5-0 Standard Head Terminations

CODE	DESCRIPTION
31,OR,GS	Aluminum screw-cover head, Class I Div II; Type 4X/IP66
34,OR,GS	Cast Iron screw-cover head, Class I Div II; Type 4X/IP66
91,OR,GS	316L Stainless Steel screw-cover head, Class I Div II; Type 4X/IP66

#### 5-1 Standard Head Options

CODE	DESCRIPTION
I	Stainless Steel Tag
SB	1/2" NPT conduit reducer bushing
T-441	4-20 mA isolated head-mounted transmitter (see instrument section)
T-442	4-20 mA HART® isolated head-mounted transmitter (see instrument section)
T82-00	(4 to 20) mA dual input HART® head-mounted transmitter

HART® is a registered trademark of HART Communication Foundation.

