


Select desired leadwire type by order code number, followed by desired length in inches.

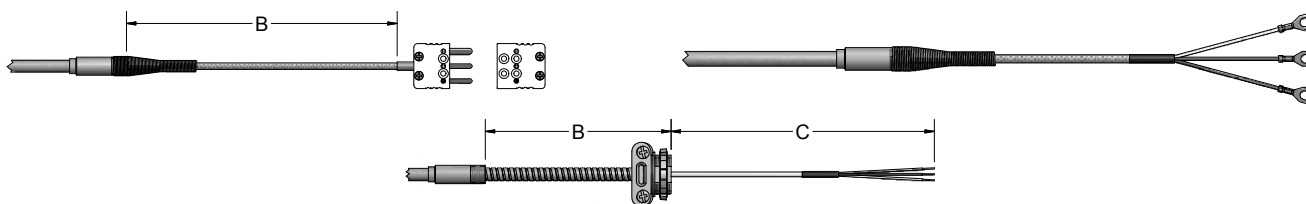

ORDER CODES

Example Order Number:

R5T185L483-006-01A,304-16

T3

4

036

-

5

PAGE
RTD-5

4 Extension Leadwire Type and B + C Dimension

CODE	DESCRIPTION	TEMP. RATING
FIBERGLASS		
F3J___	Fiberglass insulation - individual leads - stranded conductor (12" limit)	482 °C [900 °F]
F3___	Fiberglass insulation - stranded conductor	
F3A___	Fiberglass insulation - stranded conductor - flexible armor	
F3B___	Fiberglass insulation - stranded conductor - stainless steel overbraid	
FLUOROPOLYMER		
T3J___	Fluoropolymer insulation - individual leads - stranded conductor (12" limit)	204 °C [400 °F]
T3___	Fluoropolymer insulation - stranded conductor	
T3A___	Fluoropolymer insulation - stranded conductor - flexible armor	
T3B___	Fluoropolymer insulation - stranded conductor - stainless steel overbraid	
M3___	Fluoropolymer insulation - stranded conductor - stainless steel overbraid - Fluoropolymer insulation	
T3M___	Fluoropolymer insulation - stranded conductor - polyester shield	
T3MA___	Fluoropolymer insulation - stranded conductor - polyester shield - flexible armor	
POLYIMIDE		
K3___	Polyimide insulation - stranded conductor	316 °C [600 °F]
K3A___	Polyimide insulation - stranded conductor - flexible armor	
K3B___	Polyimide insulation - stranded conductor - stainless steel overbraid	
SILICON RUBBER		
S3___	Fluoropolymer insulation - stranded conductor - silicon rubber	204 °C [400 °F]
COIL CORDS		
C3060	PVC insulation - stranded conductor - coil cord - 60" extended length	104 °C [220 °F]
C3120	PVC insulation - stranded conductor - coil cord - 120" extended length	

Insert wire code number and 3 digit 'B' length in inches EXAMPLE: T3036 = 36" B length

For assemblies requiring leadwire beyond the flexible armor (illustrated in 'C' in drawing), insert 3 digit 'C' length after armor length.
EXAMPLE: F3A036 -012 = 36" B length with additional 12" 'C' length leads beyond armor.

All insulated leadwires in flexible armor are available with either extruded PVC or FEP covering over the flexible armor.
Substitute suffix codes T (FEP) or P (PVC) for the suffix 'A' code above. EXAMPLE: T3T is FEP covered armor.